




ELECTRIC POWER SUPPLIER


ESP 5850

Without box

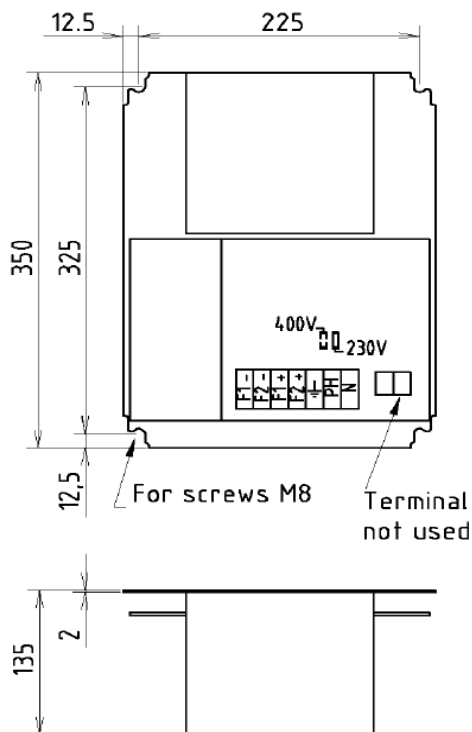


ESE 6850

In box

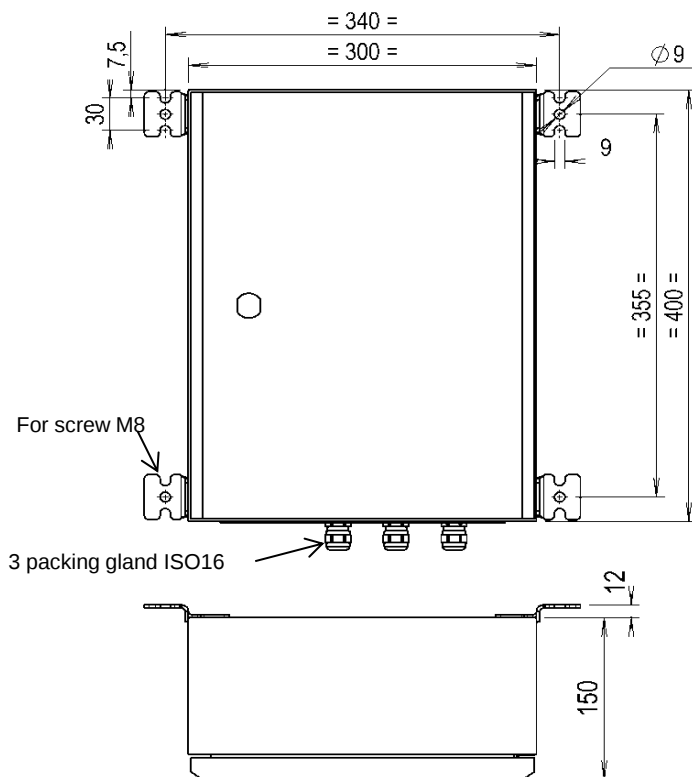

Data open to improvement

Output voltage curve

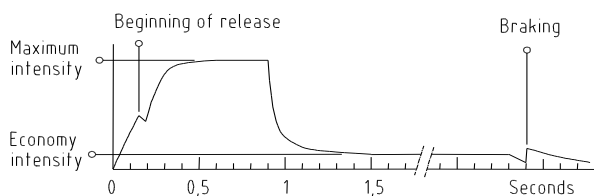

Handbook nr 026

Technical features :

Protection :

Weight :

ESP 5850

IP00

kg

12

ESE6850

IP66 / IK10

16

Working conditions :

Ambient temperature :

Humidity :

-20°C to +60°C

< 90%

Electrical features :

Supply voltage single phase

Vac

230/400 50-60 Hz

Release voltage (Off-load) :

V

65 (Internal R = 0,3 Ohm)

Economy voltage (Off-load) :

V

10 (Internal R = 0,3 Ohm)

Maximum connecting cable resistance : 0,5 Ohm per caliper

Options :

- Special input voltage

- Marinised

- With fan

- Without fast action card

Other options and 3D models available on request

Type of caliper	561SE		560SE		56SE		5SE		450SE	4SE	3SE
Number	1	2	1	2	1	2	1	2	1	1	1
Cycles per hour f=60% at 40°C	150	150	150	150	150	150	450	750	450	450	450
Release power (VA)	320	600	400	730	1400	2250	640	1120	1800	1690	2200
Economy power (VA)	15	35	20	45	100	185	40	80	130	130	175
Fuse 230V (aM)	6	6	6	6	6	10	6	6	8	8	10
Fuse 400V (aM)	4	4	4	4	4	8	4	4	6	6	8