Absolute encoders - SSI

Solid shaft ø10 mm with clamping flange

Magnetic multiturn encoders 12 bit ST / 13 bit MT

BMMV 58 SSI - *MAGRES hermetic*

BMMV 58K SSI with clamping flange

Features

- **Encoder multiturn / SSI**
- **Magnetic sensing, hermetically sealed**
- **Resolution: singleturn 12 bit, multiturn 13 bit**
- **High resistance to shock and vibrations**
- **Reset input**
- **Protection IP 69K**
- **Material: stainless steel 1.4305**

Technical data - electrical ratings

Voltage supply	5 VDC ±10 % 10...30 VDC
Consumption typ.	100 mA (5 VDC, w/o load) 50 mA (24 VDC, w/o load)
Initializing time typ.	170 ms after power on
Interface	SSI
Function	Multiturn
Steps per turn	4096 / 12 bit
Number of turns	8192 / 13 bit
Absolute accuracy	±1 °
Sensing method	Magnetic
Code	Gray or binary
Code sequence	CW: ascending values with clockwise sense of rotation; looking at flange
Inputs	SSI clock Zero setting input
Output stages	SSI data: Linedriver RS422
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL approval / E217823

Technical data - mechanical design

Size (flange)	ø58 mm
Shaft type	ø10 mm solid shaft (clamping flange)
Flange	Clamping flange
Protection DIN EN 60529	IP 68, IP 69K
Operating speed	≤6000 rpm
Operating torque typ.	0.031 Nm
Admitted shaft load	≤120 N axial (combined) ≤280 N radial (combined) ≤270 N axial (concentrated load)
Materials	Stainless steel 1.4305 (other materials on request)
Operating temperature	-40...+85 °C
Resistance	DIN EN 60068-2-6 Vibration 30 g, 10-2000 Hz DIN EN 60068-2-27 Shock 500 g, 6 ms
Weight approx.	690 g
Connection	Connector M12, 8-pin Cable

Subject to modification in technic and design. Errors and omissions excepted.

BMMV 58 SSI - *MAGRES hermetic*

Part number

Multiturn clamping flange

BMMV 58K5 | | | **12/13** | **H0** | |

Connection
- 5 Cable radial
- N Connector M12, 5-pin, radial

Solid shaft
- H0 ø10 mm, IP 68 and IP 69K

Resolution
- 12/13 12/13 bit single-/multiturn

Voltage supply / signals
- 05C 5 VDC / SSI
- 24C 10...30 VDC / SSI

Code
- N Binary code
- G Gray code

Data transfer

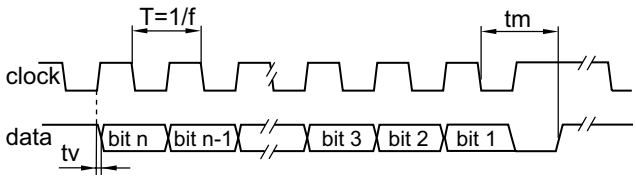

Clock frequency f	100...1000 kHz
Duty cycle of T	40...60 %
Delay time tv	200 ns
Monoflop time tm	20 µs + T/2

Trigger level

Control inputs	**Input circuit**
Input level Low	<0,4 V (>2 ms)
Input level High	+Vs or open

Accessories

Connectors and cables

10146775	Female connector M12, 8-pin, straight, without cable

Mounting accessories

10252773	Clamp set ø15 mm
11053277	Bellows coupling aluminium/stainless steel 10 mm

Subject to modification in technic and design. Errors and omissions excepted.

Absolute encoders - SSI

Solid shaft ø10 mm with clamping flange

Magnetic multiturn encoders 12 bit ST / 13 bit MT

BMMV 58 SSI - *MAGRES hermetic*

Terminal significance	
+Vs	Encoder supply voltage.
0 V	Encoder ground connection relating to +Vs.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential linedriver.
Clock+	Positive SSI clock input. Clock+ together with Clock- forms a current loop. A current of approx. 7 mA towards Clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with Clock+ forms a current loop. A current of approx. 7 mA towards Clock- input means logic 0 in positive logic.
Zero	Input for setting a zero point anywhere within the encoder resolution. The zero setting operation is triggered by a Low impulse. Connect to +Vs after setting operation for maximum interference immunity. Impulse duration >2 ms.
Rot. direction	Ascending position values when looking at the flange and rotating the shaft clockwise.

Terminal assignment

Cable
for connection reference **-5**

Core colour	Signals	Description
brown	+Vs	Supply voltage
white	0 V	Supply voltage
grey	Data+	Data signal
pink	Data-	Data signal
green	Clock+	Clock signal
yellow	Clock-	Clock signal
blue	Zero	Zero setting input
red	d.u.	do not use
Screen	connected to housing	
Cable data		8 x 0,14 mm^2

Connector M12 male
for connection reference **-N**

Connector	Signals	Description
Pin 1	0 V	Supply voltage
Pin 2	+Vs	Supply voltage
Pin 3	Clock+	Clock signal
Pin 4	Clock-	Clock signal
Pin 5	Data+	Data signal
Pin 6	Data-	Data signal
Pin 7	Zero	Zero setting input
Pin 8	d.u.	do not use

Subject to modification in technic and design. Errors and omissions excepted.

BMMV 58 SSI - *MAGRES hermetic*

Dimensions

BMMV 58 SSI, cable radial

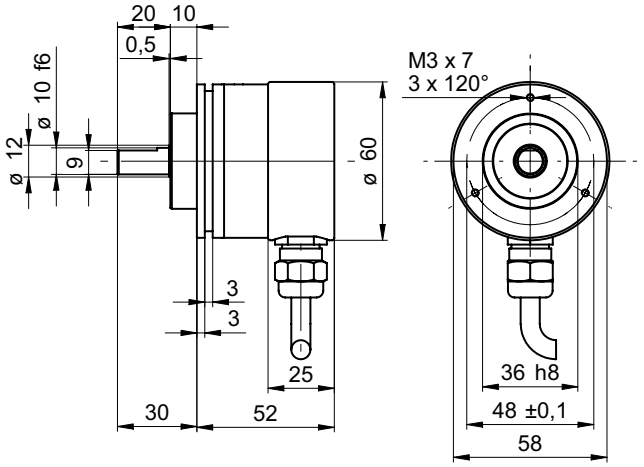

BMMV 58 SSI, connector M12 radial

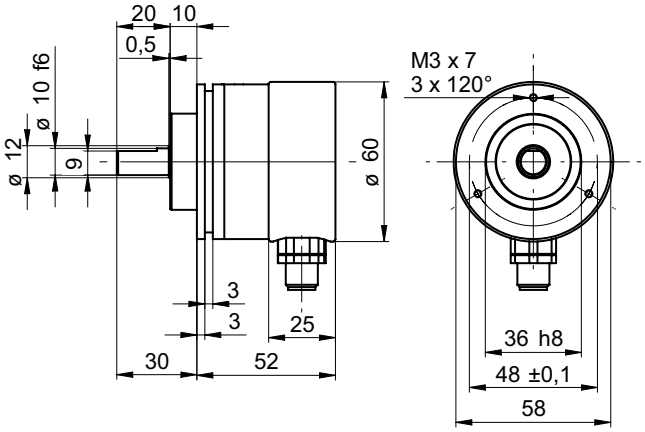

BMMV 58 SSI, cable radial, Ex

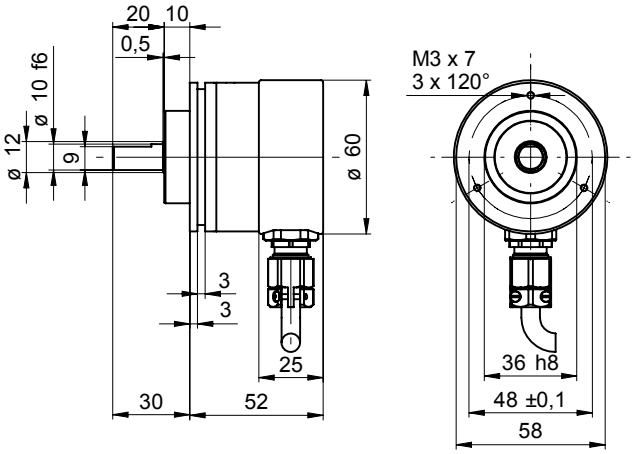

Subject to modification in technic and design. Errors and omissions excepted.